
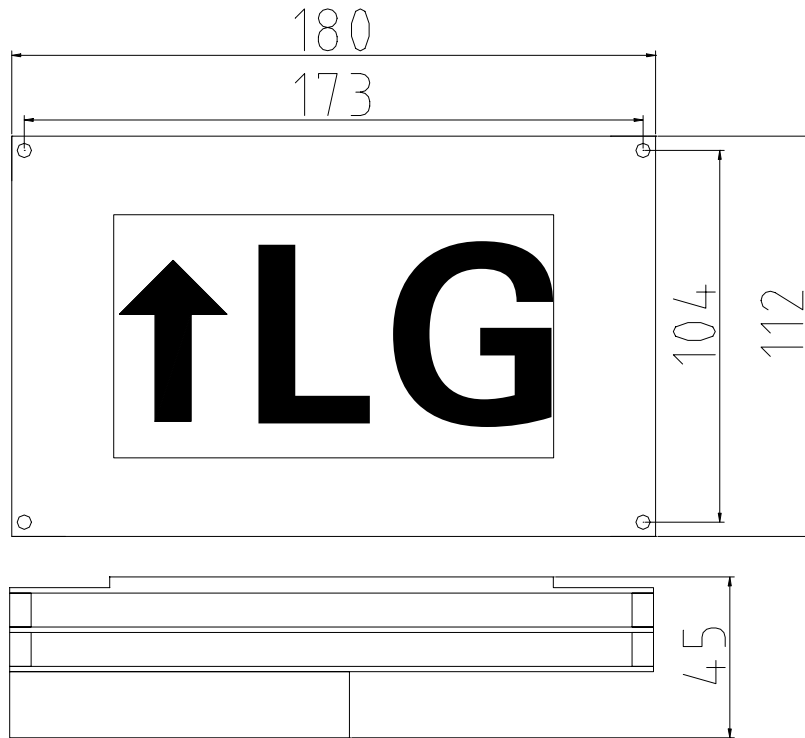


**MONO-LCD****Faceplate Cut-Out: 69(h) x 124(w) mm****Fixings: 4x M3x25mm Studs**

- Description** Mono-Chrome LCD display: high contrast black/white or blue/white display, graphical: 240x128 pixels, viewing area: 123(w) x 68(h) mm, Arial font. Character heights: Car Mode: 49mm, Landing Mode: 58mm, Time/Date: 11mm.
- Colour** Standard: Black & White (high contrast)  
Optional: Blue & White
- Standard Floor Library** 0 to 31, A to Z, -1 to -8, B1 to B8  
LB, UB, SB, LG, UG, LM, UM, MZ, SL, CP, GR, 04, 03, 02, 01
- Standard Features** Simultaneous double character position and running arrow  
Override hall lantern arrow  
Out of service symbol  
Horizontal scrolling messages  
Fixed, multi-line message (4 lines max.) – 11mm font  
Time & Date (Car Mode – if fitted) with summer/winter time correction
- Switch Selectable Features** Time/Date setting – if fitted.  
Hall lantern floor designations  
Landing or car indicator function  
Electronic chime volume
- Electrical Detail** Continuous power supply: 12vdc to 24vdc or 12vac to 18vac  
Power supply consumption: 320mA @24vdc (NOTE: Allow 3.5x this current for inrush)
- General** Unit supplied loose with a drilled & rebated Polycarbonate lens (4.5mm thick, clear) & fixing spacers
- Optional Items** Electronic chime  
Stainless steel faceplate & mild steel backbox  
Angled stainless steel surface mount enclosure  
Slim-Line version – SMLCD (20mm deep – see data sheet)

**THIS UNIT CONNECTS ONTO OUR 4-WIRE NETWORK; THEREFORE, A CONTROL UNIT MUST BE ORDERED FOR EACH LIFT**

## SM-LCD

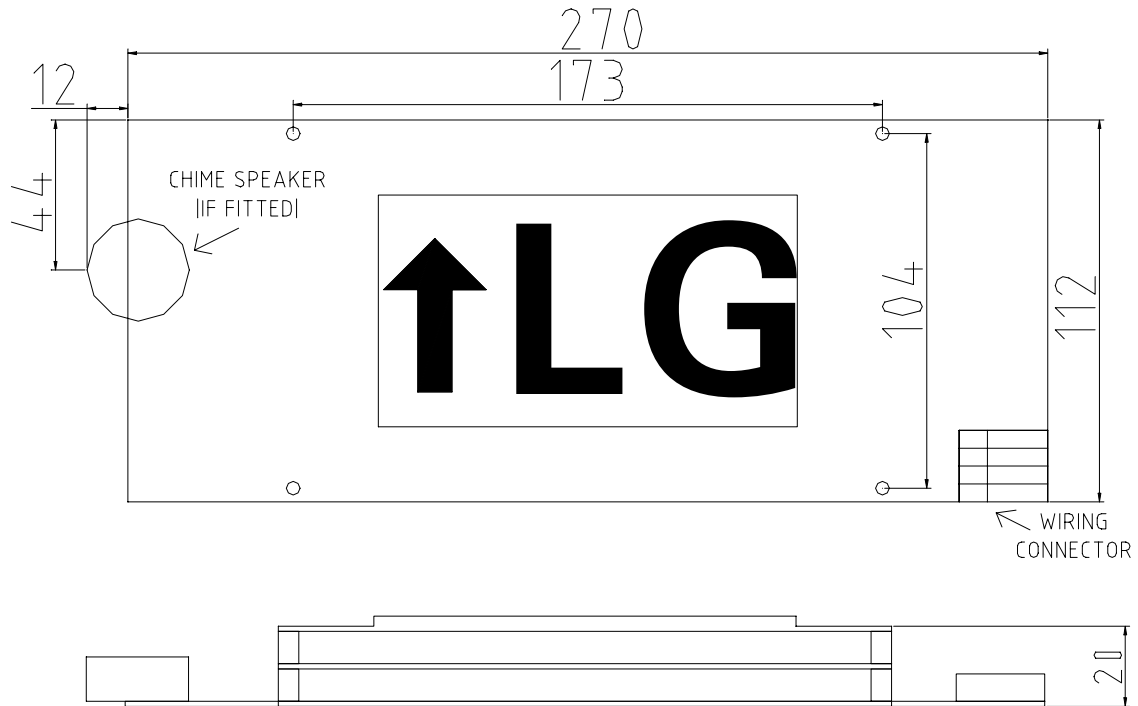

**Faceplate Cut-Out: 69(h) x 124(w) mm**

**Fixings: 4x M3x20mm Studs**

**Description** Mono-Chrome LCD display: high contrast black/white or blue/white display, graphical: 240x128 pixels, viewing area: 123(w) x 68(h) mm, Arial font. Character heights: Car Mode: 49mm, Landing Mode: 58mm.

**Colour** Standard: Black & White (high contrast)  
Optional: Blue & White

**Standard Floor Library** 0 to 31, A to Z, -1 to -8, B1 to B8  
LB, UB, SB, LG, UG, LM, UM, MZ, SL, CP, GR, 04, 03, 02, 01

**Standard Features** Simultaneous double character position and running arrow  
Override hall lantern arrow  
Out of service symbol  
Horizontal scrolling messages  
Fixed, multi-line message (4 lines max.) – 11mm font

**Switch Selectable Features** Electronic chime volume  
Hall lantern floor designations  
Landing or car indicator function

**Electrical Detail** Continuous power supply: 12vdc to 24vdc or 12vac to 18vac  
Power supply consumption: 320mA @24vdc (NOTE: Allow 3.5x this current for inrush)

**General** Unit supplied loose with a drilled & rebated Polycarbonate lens (4.5mm thick, clear) & fixing spacers

**Optional Items** Electronic chime  
Stainless steel faceplate & mild steel backbox  
Angled stainless steel surface mount enclosure  
Compact version – MONO-LCD (180x112x45mm – see data sheet)

**THIS UNIT CONNECTS ONTO OUR 4-WIRE NETWORK; THEREFORE, A CONTROL UNIT MUST BE ORDERED FOR EACH LIFT**