


SMDU50-2V

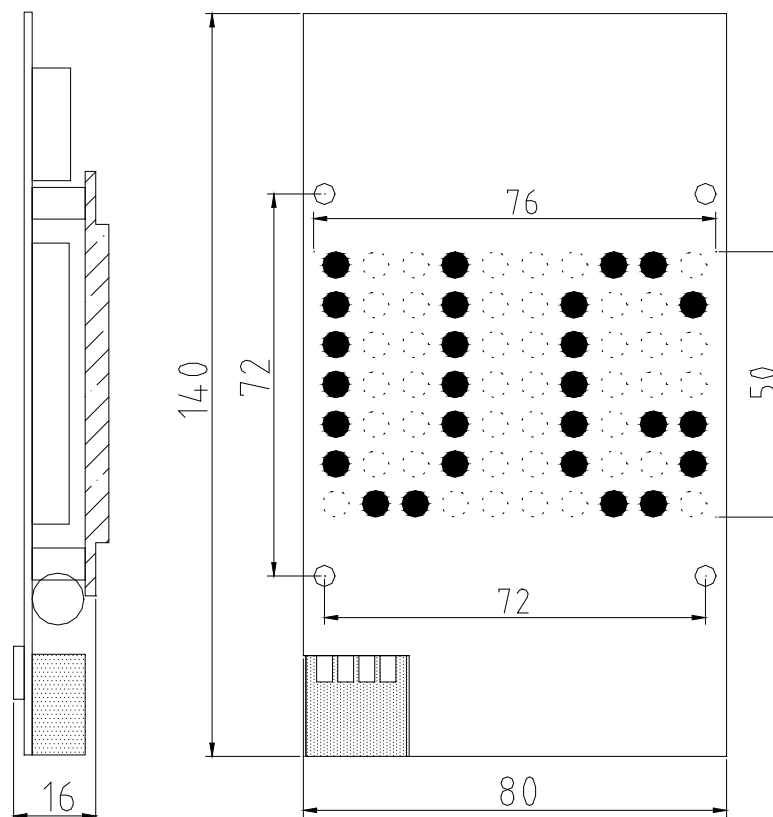

Faceplate Cut-Out: 60(h) x 76(w) mm

Fixings: 4x M3x20mm Studs

Description Single colour dot matrix LEDdisplay:7 rows, 10 columns, 50mm high, 76mm wide, 5mm dots

LED Colour Standard: Red or Green
Optional: Bright Amber, Blue or White

Standard Floor Library 0 to 31, A to Z, -1 to -8, B1 to B8
LB, UB, SB, LG, UG, LM, UM, MZ, SL, CP, GR, 04, 03, 02, 01

Standard Features Double character position
Override hall lantern arrow
Out of service symbol
Horizontal scrolling messages
Vertical scrolling (floor changes and hall lantern arrows)

Switch Selectable Features Scrolling running arrow inserted between roll-over floor changes
Hall lantern floor designations
Landing or car indicator function
Electronic chime volume

Electrical Detail Continuous power supply: 12vdc to 37vdc or 12vac to 24vac
Power supply consumption: 200mA @12vdc

General Unit supplied loose with a drilled & rebated Pacton lens (4.5mm thick, dark grey tinted) & fixing spacers

Optional Items Electronic chime
Stainless steel faceplate & mild steel backbox
Stainless steel surface mount enclosure
Compact version – MFDU50-2 (115x63x40mm – see data sheet)

THIS UNIT CONNECTS ONTO OUR 4-WIRE NETWORK; THEREFORE, A CONTROL UNIT MUST BE ORDERED FOR EACH LIFT