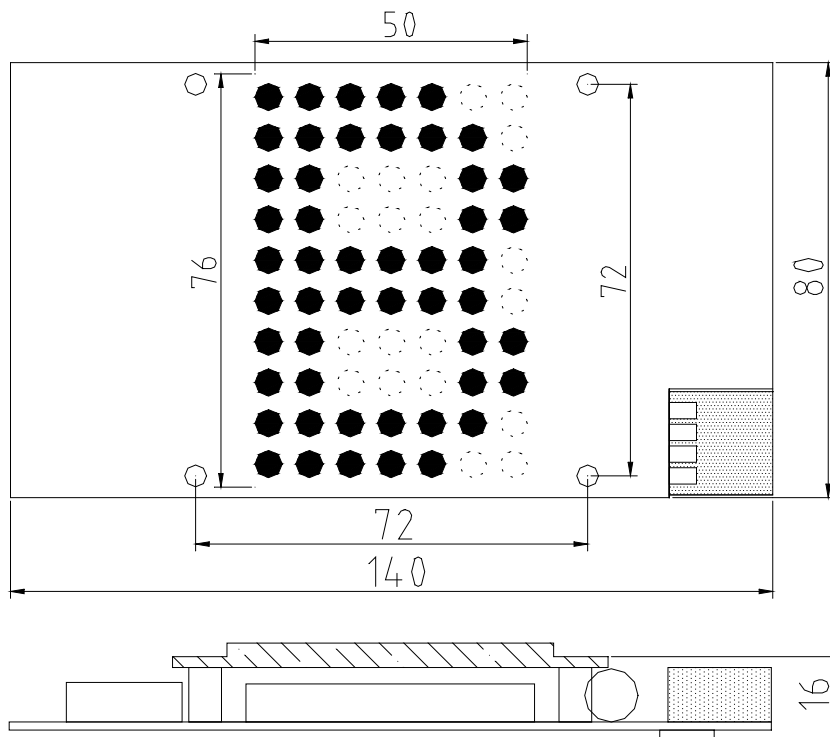


**SMDU76-1H**

**Faceplate Cut-Out: 76(h) x 60(w) mm**

**Fixings: 4x M3x20mm Studs**

**Description** Single colour dot matrix LEDdisplay:10 rows, 7 columns, 76mm high, 50mm wide, 5mm dots

**LED Colour** Standard: Red or Green  
Optional: Bright Amber, Blue or White

**Standard Floor Library** -1, 0 to 9 and A to Z

**Standard Features** Single character position  
Override hall lantern arrow  
Out of service symbol  
Vertical scrolling (floor changes & running arrows)

**Switch Selectable Features** Scrolling running arrow inserted between floor roll-over changes  
Hall lanterns only  
Scrolling running arrow overriding position  
Hall lantern floor designations  
Landing or car indicator function  
Electronic chime volume

**Electrical Detail** Continuous power supply: 12vdc to 37vdc or 12vac to 24vac  
Power supply consumption: 200mA @12vdc

**General** Unit supplied loose with a drilled & rebated Pacton lens (4.5mm thick, dark grey tinted) & fixing spacers

**Optional Items** Electronic chime  
Stainless steel faceplate & mild steel backbox  
Stainless steel surface mount enclosure  
Compact version – MFDU76-1 (63x115x40mm – see data sheet)

**THIS UNIT CONNECTS ONTO OUR 4-WIRE NETWORK; THEREFORE, A CONTROL UNIT MUST BE ORDERED FOR EACH LIFT**