


TFT LCD

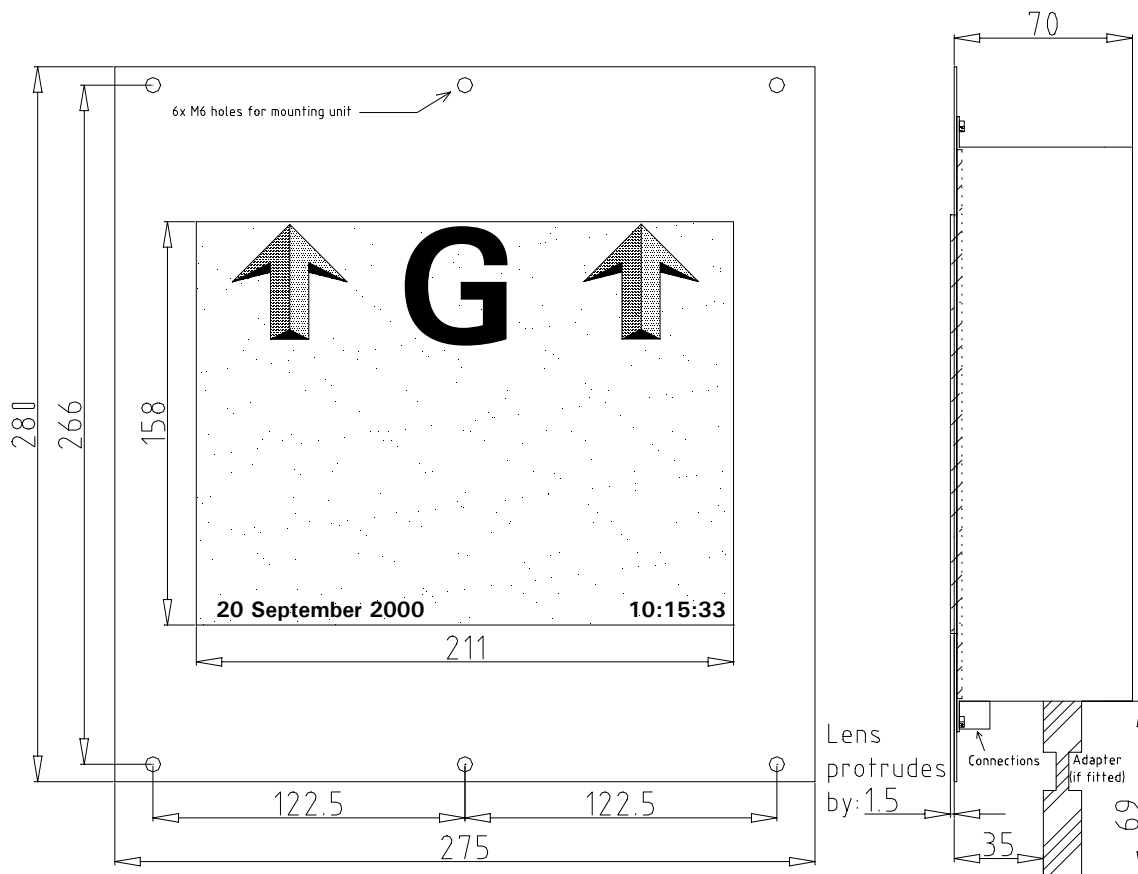

Faceplate Cut-Out: 164(h) x 217(w) mm

Fixings: 6x M4x15mm studs

Description

Full colour TFT LCD display: 256,000 colours, 211(w) x 158(h) viewing area, wide viewing angle: 120 degrees (left to right), high brightness: 350cd/m²

Standard Floor Library

0 to 31, A to Z, -1 to -8, B1 to B8
LB, UB, SB, LG, UG, LM, UM, MZ, SL, CP, GR, 04, 03, 02, 01

Standard Features

- Simultaneous floor position and 3-D effect running arrows
- Onward direction indication
- Lift status messages
- Floor directories
- Full screen background image or slide show screen images adverts etc.
- Time and date with daylight saving time and leap year correction

Electrical Detail

Continuous power supply: 240vac
Power supply consumption: 15w

General

Unit supplied loose with a drilled and rebated clear macralon lens and fixing kit.

Optional Items

- Graphical image incorporation.
- Remote programming kits

THIS UNIT CONNECTS ONTO OUR 4-WIRE NETWORK; THEREFORE, A CONTROL UNIT MUST BE ORDERED FOR EACH LIFT